



BENY Datasheet



ZHEJIANG BENYI NEW ENERGY CO.,LTD.

SHUANGHUANGLOU INDUSTRIAL ZONE, BEIBAIXIANG TOWN, YUEQING CITY, WENZHOU CITY, ZHEJIANG PROVINCE, CHINA.

TEL: +86-577-5717 7008 FAX: +86-577-5717 7007

✉ info@evb.com

🌐 www.evb.com

✖ This catalogue has been printed on ecological paper.

© Zhejiang Benyi New Energy Co., Ltd. All rights reserved.

⚠ If the models and specifications in this product catalogue change due to product updates, we will not provide prior notification.



VERSION: 20240906-01

WWW.EVB.COM


ZBENY



Product Introduction

DLB wireless device is designed according to EN 61010-1 standard, with one end built in EV Charger, and the other end connected with DLB through network cable and placed externally through the guide rail. DLB wireless device can solve the wiring trouble and realize long-distance data sending and receiving.

External device (BCP-DLB-W)

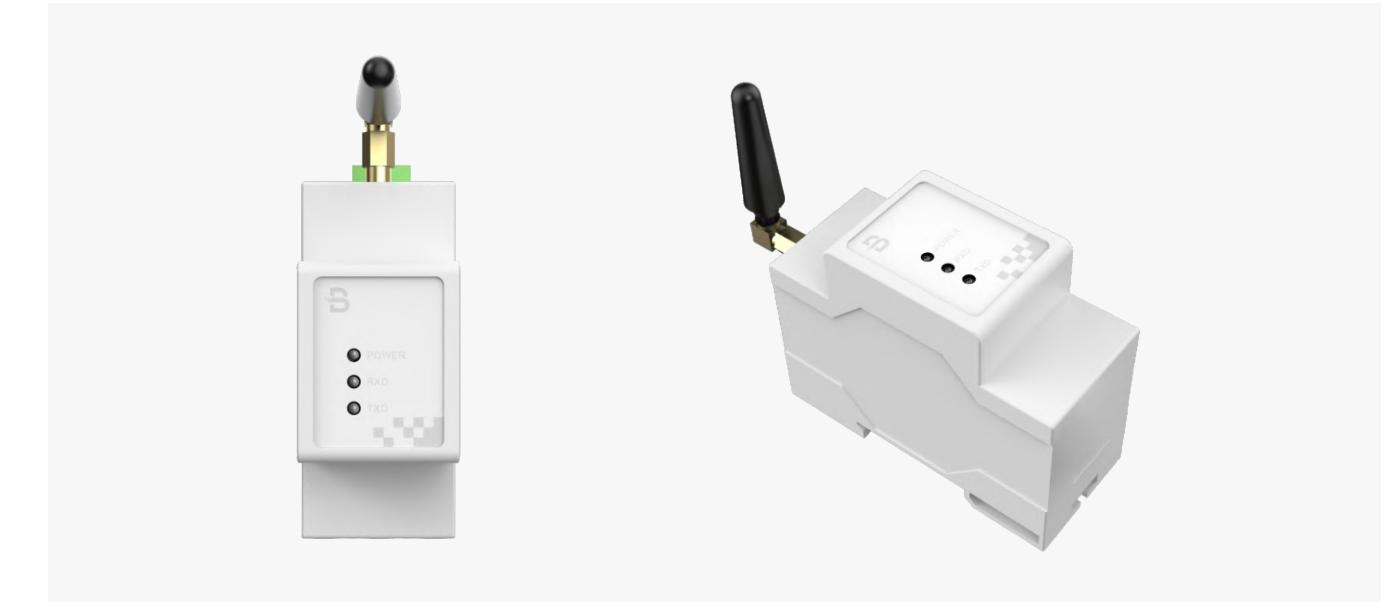

Built-in device (BCP-DLB-I)



Technical parameters table

Parameter	External device (BCP-DLB-W)	Built-in device (BCP-DLB-I)
Criterion		EN 61010-1
Rated input voltage	230V±15%	12V
Rated power	1.5W	0.6W
Transmission distance		50m-100m
Working frequency band		410MHz-510MHz
Working temperature		-30°C~55°C
Storage temperature		-40°C~80°C
Working humidity		5%-95%
Gross weight	103g	37g
Operating altitude		<2000m

Working Status

LED status	
Description of indicator status	Module status
Blue light always on	Power on
Green light flashes (TX)	Send data
Green light flashes (RX)	Receive data