



# Beny 3 Guns DC EV Charging Station

## 90kW-480kW



**Datasheet**

**Zhejiang Benyi New Energy Co.,Ltd.**

Shuanghuanglou Industrial Zone, Beibaixiang Yueqing,zhejiang P.R. China

TEL: +86-577-5717 7008 FAX: +86-577-5717 7007

✉ info@evb.com 🏠 Importer:xxxxxxx

🌐 www.evb.com 📍 Address:xxxxxxx

♻️ This catalogue has been printed on ecological paper.

© Zhejiang Benyi New Energy Co.,Ltd. All rights reserved.

⚠️ If the models and specifications in this product catalogue change due to product updates, we will not provide prior notification.



VERSION: 20260319-01

WWW.EVB.COM

**ZBENY**

# Product Overview

The Beny DC EV Charging Station boasts two remarkable 21-inch touch screens for effortless control. It offers powerful comprehensive protection features. With convenient app control and Ethernet/4G/WiFi connectivity, you can charge your EV with confidence and efficiency.



## Product Advantages



IP55 Rating



Ethernet/4G/WiFi



Full Protection



OCPP 1.6J



21-inch  
Touch Screen



RFID



APP Control

# Model Selection

DC EV Charging Station	BDC90-T	BDC120-T	BDC150-T
------------------------	---------	----------	----------



Structure Description			
Shell Material	Galvanized Sheet		
Dimension	800*900*1800(L*W*H mm)		
Packing Dimension	1050*1250*2160(L*W*H mm)		
Weight	≤370kG	≤375kG	≤390kG
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring, Up Outlet Wiring		
Total length of gun cable	5 m		
Charging Outlets	Triple(A/B/C) (A:CCS1/CCS2/GBT/CHADEMO/NACS) (B:CCS1/CCS2/GBT/CHADEMO/NACS) (C:CCS1/CCS2/GBT/CHADEMO/NACS)		
Connectivity Authorization	RFID, App		
Screen	2*(21 Inch LCD Screen/LED Light)		
<b>Electrical Specification</b>			
AC Input Voltage	AC380V-415V, 3P+N+PE		
Rated Input Current	203A	204A	255A
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	90kW	120kW	150kW
Output Voltage Range	CCS1/CCS2/NACS/GBT: 150Vdc ~ 1000Vdc; CHADEMO: 150Vdc ~ 500Vdc		
Output Current	CCS1:0~350A; CCS2:0~375A; NACS:0~380A; GBT:0~350A; CHADEMO:0~150A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		

Functionate Design		
User Interface	Emergency Stop Button, LED Indicator, Card Swiping, Touch Screen	
Charging Stands	IEC 61851-21-2:2021, IEC 61000-6-2:2019, EN61000-6-4:2019, IEC 61851-1:2010, EN 61851-23:2014, EN 61851-24:2014, IEC 61851-23:2014, EN 61851-1:2011	
communication		
OCPP	OCPP 1.6J	
Network Interface	Ethernet/4G/WIFI	
RF Parameters		
LTE Band 1:1920-1980MHz (Uplink), 2110-2170MHz (Downlink)	RFID: 13.56MHz	
LTE Band 3:1710-1785MHz (Uplink), 1805-1880MHz (Downlink)	Wi-Fi: 2412-2472MHz (TX/RX)	
LTE Band 7: 2500-2570MHz (Uplink), 2620-2690MHz (Downlink)		
LTE Band 20: 832-862MHz (Uplink), 791-821MHz (Downlink)		
LTE Band 28: 703-748 MHz (Uplink), Downlink: 758-803 MHz (Downlink)		
LTE Band 38: 2570-2620 MHz (Uplink), Downlink: 2570-2620 MHz (Downlink)		
LTE Band 40: 2300-2400 MHz (Uplink), Downlink: 2300-2400 MHz (Downlink)		
LTE Band 41: 2496-2690 MHz (Uplink), Downlink: 2496-2690 MHz (Downlink)		
LTE Band 8: 880-915MHz (Uplink), 925-960MHz (Downl)		
Maximum output power		
Wi-Fi: 18.82dBm	LTE: ≤25dBm	
Environment Condition		
Application Place	Indoor/Outdoor	
Working Altitude	<2000m	
Storage Temperature	-30°C~+85°C	
Working Temperature	-30°C~+50°C	
Working Humidity	5%~95%	
Protection Level	Ip55 IK10( Screen IK08 )	
Natural Cooling	Forced-air Cooling(Independent Duct)	
Security Design	Over/Under Voltage Protection, Overload Protection, Current Leakage Protection, Grounding Protection, Over Temp Protection, Lightning Surge Protection	

# Model Selection

DC EV Charging Station	BDC160-T	BDC180-T	BDC200-T
------------------------	----------	----------	----------



Structure Description			
Shell Material	Galvanized Sheet		
Dimension	800*900*1800(L*W*H mm)		
Packing Dimension	1050*1250*2160(L*W*H mm)		
Weight	≤395kG	≤405kG	≤415kG
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring, Up Outlet Wiring		
Total length of gun cable	5 m		
Charging Outlets	Triple(A/B/C) (A:CCS1/CCS2/GBT/CHADEMO/NACS) (B:CCS1/CCS2/GBT/CHADEMO/NACS) (C:CCS1/CCS2/GBT/CHADEMO/NACS)		
Connectivity Authorization	RFID, App		
Screen	2*(21 Inch LCD Screen/LED Light)		
<b>Electrical Specification</b>			
AC Input Voltage	AC380V-415V, 3P+N+PE		
Rated Input Current	272A	306A	340A
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	160kW	180kW	200kW
Output Voltage Range	CCS1/CCS2/NACS/GBT: 150Vdc ~ 1000Vdc;CHADEMO: 150Vdc ~ 500Vdc		
Output Current	CCS1:0~350A;CCS2:0~375A;NACS:0~380A;GBT:0~350A;CHADEMO:0~150A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		

Functionate Design	
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen
Charging Stands	IEC 61851-21-2:2021, IEC 61000-6-2:2019, EN61000-6-4:2019, IEC 61851-1:2010, EN 61851-23:2014, EN 61851-24:2014, IEC 61851-23:2014, EN 61851-1:2011
communication	
OCPP	OCPP 1.6J
Network Interface	Ethernet/4G/WIFI
RF Parameters	
LTE Band 1:1920-1980MHz (Uplink), 2110-2170MHz (Downlink)	RFID: 13.56MHz
LTE Band 3:1710-1785MHz (Uplink), 1805-1880MHz (Downlink)	Wi-Fi: 2412-2472MHz (TX/RX)
LTE Band 7: 2500-2570MHz (Uplink), 2620-2690MHz (Downlink)	
LTE Band 20: 832-862MHz (Uplink), 791-821MHz (Downlink)	
LTE Band 28: 703-748 MHz (Uplink), Downlink: 758-803 MHz (Downlink)	
LTE Band 38: 2570-2620 MHz (Uplink), Downlink: 2570-2620 MHz (Downlink)	
LTE Band 40: 2300-2400 MHz (Uplink), Downlink: 2300-2400 MHz (Downlink)	
LTE Band 41: 2496-2690 MHz (Uplink), Downlink: 2496-2690 MHz (Downlink)	
LTE Band 8: 880-915MHz (Uplink), 925-960MHz (Downl)	
Maximum output power	
Wi-Fi: 18.82dBm	LTE: ≤25dBm
Environment Condition	
Application Place	Indoor/Outdoor
Working Altitude	<2000m
Storage Temperature	-30°C~+85°C
Working Temperature	-30°C~+50°C
Working Humidity	5%~95%
Protection Level	Ip55 IK10( Screen IK08 )
Natural Cooling	Forced-air Cooling(Independent Duct)
Security Design	Over/Under Voltage Protection, Overload Protection, Current Leakage Protection, Grounding Protection, Over Temp Protection, Lightning Surge Protection

# Model Selection

DC EV Charging Station	BDC210-T	BDC240-T	BDC270-T
------------------------	----------	----------	----------



Structure Description			
Shell Material	Galvanized Sheet		
Dimension	800*900*1800(L*W*H mm)		
Packing Dimension	1050*1250*2160(L*W*H mm)		
Weight	≤425kG	≤445kG	≤455kG
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring, Up Outlet Wiring		
Total length of gun cable	5 m		
Charging Outlets	Triple(A/B/C) (A:CCS1/CCS2/GBT/CHADEMO/NACS) (B:CCS1/CCS2/GBT/CHADEMO/NACS) (C:CCS1/CCS2/GBT/CHADEMO/NACS)		
Connectivity Authorization	RFID, App		
Screen	2*(21 Inch LCD Screen/LED Light)		
<b>Electrical Specification</b>			
AC Input Voltage	AC380V-415V, 3P+N+PE		
Rated Input Current	357A	407A	458A
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	210kW	240kW	270kW
Output Voltage Range	CCS1/CCS2/NACS/GBT: 150Vdc ~ 1000Vdc;CHADEMO: 150Vdc ~ 500Vdc		
Output Current	CCS1:0~350A;CCS2:0~375A;NACS:0~380A;GBT:0~350A;CHADEMO:0~150A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		

Functionate Design	
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen
Charging Stands	IEC 61851-21-2:2021, IEC 61000-6-2:2019, EN61000-6-4:2019, IEC 61851-1:2010, EN 61851-23:2014, EN 61851-24:2014, IEC 61851-23:2014, EN 61851-1:2011
communication	
OCPP	OCPP 1.6J
Network Interface	Ethernet/4G/WIFI
RF Parameters	
LTE Band 1:1920-1980MHz (Uplink), 2110-2170MHz (Downlink)	RFID: 13.56MHz
LTE Band 3:1710-1785MHz (Uplink), 1805-1880MHz (Downlink)	Wi-Fi: 2412-2472MHz (TX/RX)
LTE Band 7: 2500-2570MHz (Uplink), 2620-2690MHz (Downlink)	
LTE Band 20: 832-862MHz (Uplink), 791-821MHz (Downlink)	
LTE Band 28: 703-748 MHz (Uplink), Downlink: 758-803 MHz (Downlink)	
LTE Band 38: 2570-2620 MHz (Uplink), Downlink: 2570-2620 MHz (Downlink)	
LTE Band 40: 2300-2400 MHz (Uplink), Downlink: 2300-2400 MHz (Downlink)	
LTE Band 41: 2496-2690 MHz (Uplink), Downlink: 2496-2690 MHz (Downlink)	
LTE Band 8: 880-915MHz (Uplink), 925-960MHz (Downl)	
Maximum output power	
Wi-Fi: 18.82dBm	LTE: ≤25dBm
Environment Condition	
Application Place	Indoor/Outdoor
Working Altitude	<2000m
Storage Temperature	-30°C~+85°C
Working Temperature	-30°C~+50°C
Working Humidity	5%~95%
Protection Level	Ip55 IK10( Screen IK08 )
Natural Cooling	Forced-air Cooling(Independent Duct)
Security Design	Over/Under Voltage Protection, Overload Protection, Current Leakage Protection, Grounding Protection, Over Temp Protection, Lightning Surge Protection

# Model Selection




DC EV Charging Station	BDC280-T	BDC300-T	BDC320-T
------------------------	----------	----------	----------



Structure Description			
Shell Material	Galvanized Sheet		
Dimension	800*900*1800(L*W*H mm)		
Packing Dimension	1050*1250*2160(L*W*H mm)		
Weight	≤460kG	≤475kG	≤485kG
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring, Up Outlet Wiring		
Total length of gun cable	5 m		
Charging Outlets	Triple(A/B/C) (A:CCS1/CCS2/GBT/CHADEMO/NACS) (B:CCS1/CCS2/GBT/CHADEMO/NACS) (C:CCS1/CCS2/GBT/CHADEMO/NACS)		
Connectivity Authorization	RFID, App		
Screen	2*(21 Inch LCD Screen/LED Light)		
<b>Electrical Specification</b>			
AC Input Voltage	AC380V-415V, 3P+N+PE		
Rated Input Current	475A	509A	543A
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	280kW	300kW	320kW
Output Voltage Range	CCS1/CCS2/NACS/GBT: 150Vdc ~ 1000Vdc; CHADEMO: 150Vdc ~ 500Vdc		
Output Current	CCS1:0~350A; CCS2:0~375A; NACS:0~380A; GBT:0~350A; CHADEMO:0~150A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		

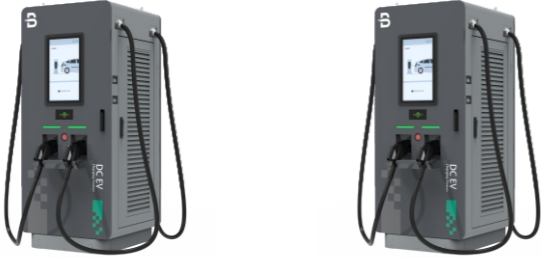
Functionate Design	
User Interface	Emergency Stop Button, LED Indicator, Card Swiping, Touch Screen
Charging Stands	IEC 61851-21-2:2021, IEC 61000-6-2:2019, EN61000-6-4:2019, IEC 61851-1:2010, EN 61851-23:2014, EN 61851-24:2014, IEC 61851-23:2014, EN 61851-1:2011
communication	
OCPP	OCPP 1.6J
Network Interface	Ethernet/4G/WIFI
RF Parameters	
LTE Band 1:1920-1980MHz (Uplink), 2110-2170MHz (Downlink)	RFID: 13.56MHz
LTE Band 3:1710-1785MHz (Uplink), 1805-1880MHz (Downlink)	Wi-Fi: 2412-2472MHz (TX/RX)
LTE Band 7: 2500-2570MHz (Uplink), 2620-2690MHz (Downlink)	
LTE Band 20: 832-862MHz (Uplink), 791-821MHz (Downlink)	
LTE Band 28: 703-748 MHz (Uplink), Downlink: 758-803 MHz (Downlink)	
LTE Band 38: 2570-2620 MHz (Uplink), Downlink: 2570-2620 MHz (Downlink)	
LTE Band 40: 2300-2400 MHz (Uplink), Downlink: 2300-2400 MHz (Downlink)	
LTE Band 41: 2496-2690 MHz (Uplink), Downlink: 2496-2690 MHz (Downlink)	
LTE Band 8: 880-915MHz (Uplink), 925-960MHz (Downl)	
Maximum output power	
Wi-Fi: 18.82dBm	LTE: ≤25dBm
Environment Condition	
Application Place	Indoor/Outdoor
Working Altitude	<2000m
Storage Temperature	-30°C~+85°C
Working Temperature	-30°C~+50°C
Working Humidity	5%~95%
Protection Level	Ip55 IK10( Screen IK08 )
Natural Cooling	Forced-air Cooling(Independent Duct)
Security Design	Over/Under Voltage Protection, Overload Protection, Current Leakage Protection, Grounding Protection, Over Temp Protection, Lightning Surge Protection

# Model Selection

DC EV Charging Station	BDC330-T	BDC360-T	BDC400-T
			
<b>Structure Description</b>			
Shell Material	Galvanized Sheet		
Dimension	800*900*1800(L*W*H mm)		
Packing Dimension	1050*1250*2160(L*W*H mm)		
Weight	≤495kG	≤515kG	≤525kG
Installation Method	Floor-stand Type		
Cable Routing	Bottom Inlet Wiring, Up Outlet Wiring		
Total length of gun cable	5 m		
Charging Outlets	Triple(A/B/C) (A:CCS1/CCS2/GBT/CHADEMO/NACS) (B:CCS1/CCS2/GBT/CHADEMO/NACS) (C:CCS1/CCS2/GBT/CHADEMO/NACS)		
Connectivity Authorization	RFID, App		
Screen	2*(21 Inch LCD Screen/LED Light)		
<b>Electrical Specification</b>			
AC Input Voltage	AC380V-415V, 3P+N+PE		
Rated Input Current	560A	611A	680A
Input Frequency	50Hz/60Hz		
Consumption	≤24W		
Rated Power	90kW	120kW	150kW
Output Voltage Range	CCS1/CCS2/NACS/GBT: 150Vdc ~ 1000Vdc;CHADEMO: 150Vdc ~ 500Vdc		
Output Current	CCS1:0~350A;CCS2:0~375A;NACS:0~380A;GBT:0~350A;CHADEMO:0~150A		
Efficiency	≥95%		
Power Factor	≥0.99(load:100%)		

<b>Functionate Design</b>	
User Interface	Emergency Stop Button,LED Indicator,Card Swiping,Touch Screen
Charging Stands	IEC 61851-21-2:2021, IEC 61000-6-2:2019, EN61000-6-4:2019, IEC 61851-1:2010, EN 61851-23:2014, EN 61851-24:2014, IEC 61851-23:2014, EN 61851-1:2011
communication	
OCPP	OCPP 1.6J
Network Interface	Ethernet/4G/WIFI
<b>RF Parameters</b>	
LTE Band 1:1920-1980MHz (Uplink), 2110-2170MHz (Downlink)	RFID: 13.56MHz
LTE Band 3:1710-1785MHz (Uplink), 1805-1880MHz (Downlink)	Wi-Fi: 2412-2472MHz (TX/RX)
LTE Band 7: 2500-2570MHz (Uplink), 2620-2690MHz (Downlink)	
LTE Band 20: 832-862MHz (Uplink), 791-821MHz (Downlink)	
LTE Band 28: 703-748 MHz (Uplink), Downlink: 758-803 MHz (Downlink)	
LTE Band 38: 2570-2620 MHz (Uplink), Downlink: 2570-2620 MHz (Downlink)	
LTE Band 40: 2300-2400 MHz (Uplink), Downlink: 2300-2400 MHz (Downlink)	
LTE Band 41: 2496-2690 MHz (Uplink), Downlink: 2496-2690 MHz (Downlink)	
LTE Band 8: 880-915MHz (Uplink), 925-960MHz (Downl)	
<b>Maximum output power</b>	
Wi-Fi: 18.82dBm	LTE: ≤25dBm
<b>Environment Condition</b>	
Application Place	Indoor/Outdoor
Working Altitude	<2000m
Storage Temperature	-30°C~+85°C
Working Temperature	-30°C~+50°C
Working Humidity	5%~95%
Protection Level	Ip55 IK10( Screen IK08 )
Natural Cooling	Forced-air Cooling(Independent Duct)
Security Design	Over/Under Voltage Protection, Overload Protection, Current Leakage Protection, Grounding Protection, Over Temp Protection, Lightning Surge Protection

# Model Selection

DC EV Charging Station	BDC440-T	BDC480-T
		
Structure Description		
Shell Material	Galvanized Sheet	
Dimension	800*900*1800(L*W*H mm)	
Packing Dimension	1050*1250*2160(L*W*H mm)	
Weight	≤540kG	≤555kG
Installation Method	Floor-stand Type	
Cable Routing	Bottom Inlet Wiring, Up Outlet Wiring	
Total length of gun cable	5 m	
Charging Outlets	Triple(A/B/C) (A:CCS1/CCS2/GBT/CHADEMO/NACS) (B:CCS1/CCS2/GBT/CHADEMO/NACS) (C:CCS1/CCS2/GBT/CHADEMO/NACS)	
Connectivity Authorization	RFID, App	
Screen	2*(21 Inch LCD Screen/LED Light)	
<b>Electrical Specification</b>		
AC Input Voltage	AC380V-415V, 3P+N+PE	
Rated Input Current	747A	815A
Input Frequency	50Hz/60Hz	
Consumption	≤24W	
Rated Power	440kW	480kW
Output Voltage Range	CCS1/CCS2/NACS/GBT: 150Vdc ~ 1000Vdc; CHADEMO: 150Vdc ~ 500Vdc	
Output Current	CCS1:0~350A; CCS2:0~375A; NACS:0~380A; GBT:0~350A; CHADEMO:0~150A	
Efficiency	≥95%	
Power Factor	≥0.99(load:100%)	

Functionate Design	
User Interface	Emergency Stop Button, LED Indicator, Card Swiping, Touch Screen
Charging Stands	IEC 61851-21-2:2021, IEC 61000-6-2:2019, EN61000-6-4:2019, IEC 61851-1:2010, EN 61851-23:2014, EN 61851-24:2014, IEC 61851-23:2014, EN 61851-1:2011
communication	
OCPP	OCPP 1.6J
Network Interface	Ethernet/4G/WIFI
RF Parameters	
LTE Band 1:1920-1980MHz (Uplink), 2110-2170MHz (Downlink)	RFID: 13.56MHz
LTE Band 3:1710-1785MHz (Uplink), 1805-1880MHz (Downlink)	Wi-Fi: 2412-2472MHz (TX/RX)
LTE Band 7: 2500-2570MHz (Uplink), 2620-2690MHz (Downlink)	
LTE Band 20: 832-862MHz (Uplink), 791-821MHz (Downlink)	
LTE Band 28: 703-748 MHz (Uplink), Downlink: 758-803 MHz (Downlink)	
LTE Band 38: 2570-2620 MHz (Uplink), Downlink: 2570-2620 MHz (Downlink)	
LTE Band 40: 2300-2400 MHz (Uplink), Downlink: 2300-2400 MHz (Downlink)	
LTE Band 41: 2496-2690 MHz (Uplink), Downlink: 2496-2690 MHz (Downlink)	
LTE Band 8: 880-915MHz (Uplink), 925-960MHz (Downl)	
Maximum output power	
Wi-Fi: 18.82dBm	LTE: ≤25dBm
Environment Condition	
Application Place	Indoor/Outdoor
Working Altitude	<2000m
Storage Temperature	-30°C~+85°C
Working Temperature	-30°C~+50°C
Working Humidity	5%~95%
Protection Level	Ip55 IK10( Screen IK08 )
Natural Cooling	Forced-air Cooling(Independent Duct)
Security Design	Over/Under Voltage Protection, Overload Protection, Current Leakage Protection, Grounding Protection, Over Temp Protection, Lightning Surge Protection